
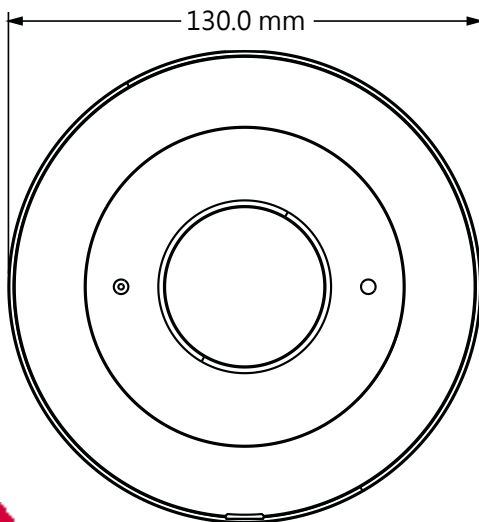


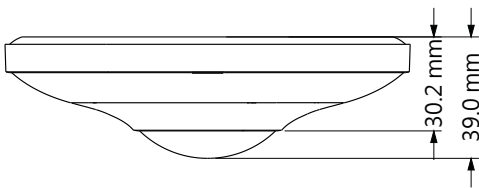

IP CAMERA

HS-D063RW

- H.265 / H.264 / MJPEG
- 6MP (2160 × 2160)
- 15 M IR night view distance
- 2 / 3 DNR, WDR
- ICR auto switch, true day / night
- Support ROI coding
- Support smart phone, iPad, remote monitoring
- Support CVBS local video, two-way audio and PoE power supply

RoHS **CE** **FC**





HS-D063RW

Camera	
Image Sensor	1 / 2.9 " CMOS
Image Size	2160 × 2160
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Min. Illumination	0.068lux @F2.0, AGC ON; 0 lux with IR
Lens	Board 1.07 mm @F2.5
Horizontal view Angle	180° (Wall mounting) / 360° (Ceiling mounting)
IR Distance	15 m
WDR	Digital WDR
Day & Night	ICR auto switch
BLC	YES
HLC	-
Digital Defog	-
Digital NR	2 / 3 DNR
Image	
Video Compression	H.265 / H.264 / MJPEG
Resolution	2160 x 2160, 1920 x 1920, 1440 x 1440, 960 x 960, 480 x 480
Main Stream (S1)	2160 x 2160, 1920 x 1920, 1440 x 1440 @30fps
Sub Stream (S2)	960 x 960 @30fps
Third Stream (S3)	480 x 480 @30fps
Bit Rate	64 Kbps ~ 16 Mbps
Bit Rate Type	VBR / CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
Audio	
Audio Compression	G.711A / U
Two-way audio	YES
Interfaces	
Network	RJ45
RS 485	YES
Video Output	CVBS video output (BNC × 1)
Audio line in	Audio Line In x 1 ; Build-in MIC x 1
Audio line out	Audio Line Out × 1
Alarm Input	1CH alarm input
Alarm Output	1CH alarm output
Storage	
SD card	Built-in micro SD card slot; up to 128GB
Network remote storage	Yes
Hardware Reset	-

Functions	
Remote Monitoring	IE browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 10 users Support multi-stream real time transmission
Network Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Interface Protocol	ONVIF
Smart Alarm	Motion detection; Sensor alarm
Intelligent Analytics	-
General function	Watermark, video mask, password protection
PoE	Yes
Others	
Power Supply	DC12V/ PoE
Power Consumption	< 12W
Operating Environment	- 20 ° C ~ 50 ° C 10 % ~ 90 % relative humidity
Dimensions	Φ 39 × 130 mm
Weight	Approx. 432 g
Installation	Ceiling mounting (wall mounting available with the junction box and bracket)
Accessories	
 B632	